


Skizze / Bild

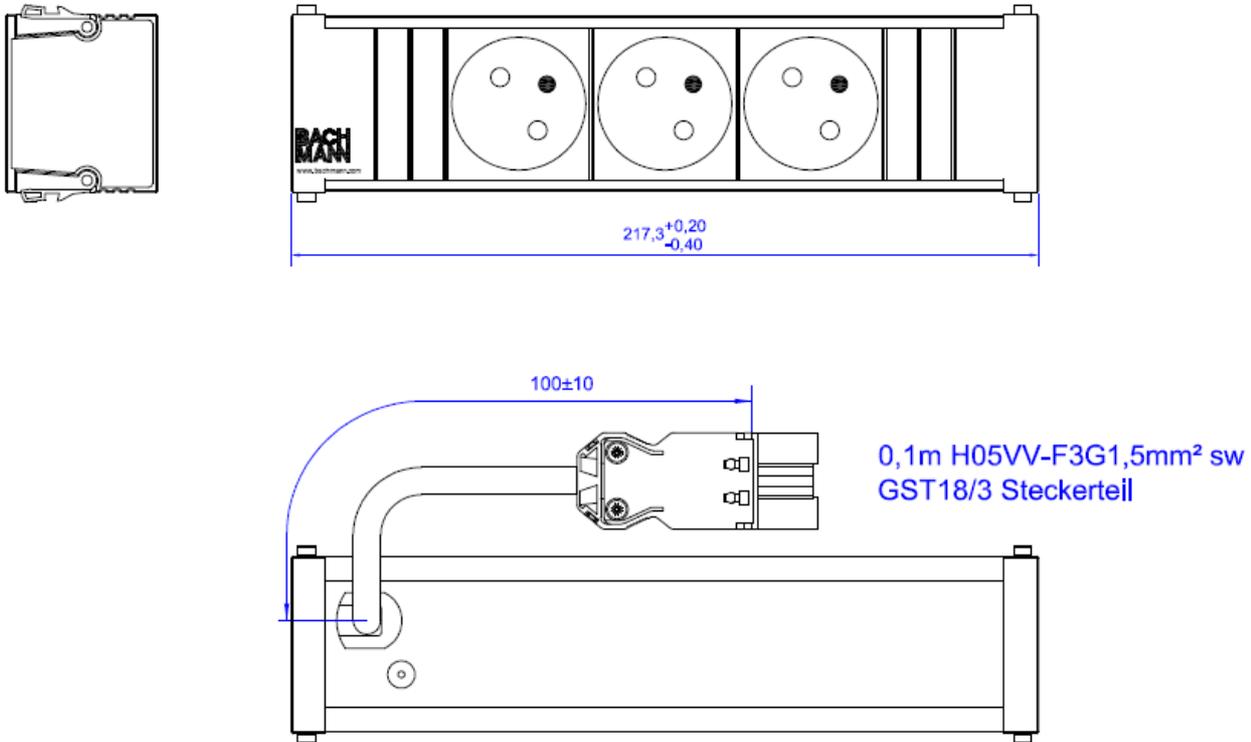

<p>Coni 3xSteckdose Frankreich/UTE mit 0,10m H05VV-F3G1,5mm² mit GST18i3 Steckverbinder</p> <p>Steckdosen:</p> <ul style="list-style-type: none"> Nach IEC 60884, NF-C61314 2-polig mit Schutzkontakt, mit Kinderschutz Mit eingebauter, auswechselbaren Feinsicherung 3,15A 13A, AC250V, IP20, 90° Schwarz <p>Anschluss:</p> <ul style="list-style-type: none"> Stromeingang 0,10m H05VV-F3G1,5mm² Leitung und GST18i3 Steckverbinder <p>Profil:</p> <ul style="list-style-type: none"> ALU eloxiert <p>Kunststoff:</p> <ul style="list-style-type: none"> PA 6 GF, schwarz, Glühdrahtprüfung bis 850°C <p>Endkappen:</p> <ul style="list-style-type: none"> Genietet, nicht wiederanschließbar <p>Abmessungen (Länge x Breite x Höhe) in mm:</p> <ul style="list-style-type: none"> Gemäß Zeichnung <p>Lieferform:</p> <ul style="list-style-type: none"> Im Polybeutel verpackt <p>Lieferumfang:</p> <ul style="list-style-type: none"> 1x Steckdoseneinheit Coni 	<p>Coni 3xsocket France/UTE with 0,10m H05VV-F3G1,5mm² with GST18i3 connector</p> <p>Sockets:</p> <ul style="list-style-type: none"> According IEC 60884, NF-C61314 2-pole with earthing contact, incl. child protection With integrated and changeable fuse 3,15A 13A, AC250V, IP20, 90° Black <p>Connection:</p> <ul style="list-style-type: none"> Power input 0,1m H05VV-F3G1,5mm² and GST18i3 plug <p>Profile:</p> <ul style="list-style-type: none"> Aluminum anodized <p>Plastic material:</p> <ul style="list-style-type: none"> PA 6 GF, black, glow wire resistant up to 850°C <p>Endcaps:</p> <ul style="list-style-type: none"> With rivets, non rewirable <p>Measurements (length x width x height):</p> <ul style="list-style-type: none"> According to drawing <p>Packing:</p> <ul style="list-style-type: none"> In polybag <p>Extent of delivery:</p> <ul style="list-style-type: none"> 1x PDU CONI
---	--