



LED Waterproof Power Supply(C&V)

- Protections: short circuit/over load/over voltage/over temperature
- IP67 design for indoor or outdoor installation
- It can be used in dry, wet and rainy environment
- Cooling by free air, high reliability
- 100% full load burn-in test
- Suitable for internal lights application for I / II / III.
- Widely used in LED lighting and IT equipment
- Compliance to worldwide safety regulation for led lightings.



CE SELV

IP67




Specification

Model		SLIM-12V-60W		SLIM-24V-60W
OUTPUT	Output voltage	12VDC		24VDC
	Output voltage range	12VDC±0.5VDC		24VDC±0.5VDC
	Output current	Max 5A		Max 2.5A
	Output power	Max 60W		
	Output power range	0~60W		
	Ripple & Noise	≤120mV	≤240mV	
	Linear Regulation	±1%		
	Load Regulation	±1%		
	Start-up Time (Typ)	600ms/230VAC 800ms/115VAC		
INPUT	Hold Up Time(Typ)	100ms/230VAC 100ms/115VAC		
	Input voltage	100-264Vac		
	Frequency	50/60Hz		
	Input current	0.52A/230Vac or 0.92A/115Vac		
	Power factor	PF>0.6		
	No-load power consumption	<3W		
	Efficiency (typ.)	84%	86%	
	Inrush current(typ.)	Cold start 50A at 230Vac		
	Control surge capability	L,N:2KV L,N-PE:4KV		
ENVIRONMENT	Leakage current	Max. 0.5mA		
	Working temperature	ta: -30°C~50°C tc: 80°C		
	Working humidity	20 ~ 99%RH, condensing(Waterproof)		
PROTECTION	Storage temp., humidity	-40°C ~ 80°C, 10~95%RH		
	Overtemperature	Protection type: Turn off the output voltage, after the temperature drops, re-energize to restore.		
	Over load protection	Shut down the output when current load ≥110%~150%, auto recovers.		
SAFETY & EMC	Short circuit protection	Protection type: It can be automatically restored after the fault is eliminated.		
	Withstand voltage	I/P-O/P:3750Vac		
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH		
	Safety standards	IEC/EN61347;IEC/EN60950;IP67		
Reliability and Quality Control	EMC Test Standards	EN55015:2013;EN61547:2009; EN61000-3-2:2014; EN61000-3-3:2013		
	Impact aging	100% of the product is fully loaded and impacted for 4 hours under an environment of at least 40°C±5°C		
	Component derating	Under the steady-state conditions of rated input and output, the stress of components will not exceed its maximum nominal value		
NOTE	1. All parameters not specifically mentioned are measured at 230VAC input, rated load and 25°C ambient temperature. 2. Ripple and noise test method: connect 0.1uF and 47uF capacitors in parallel at the terminal, and measure under 20MHZ bandwidth. 3. Ensure that the power supply is used under the rated parameters and environment.			




Dimensions

Unit:mm

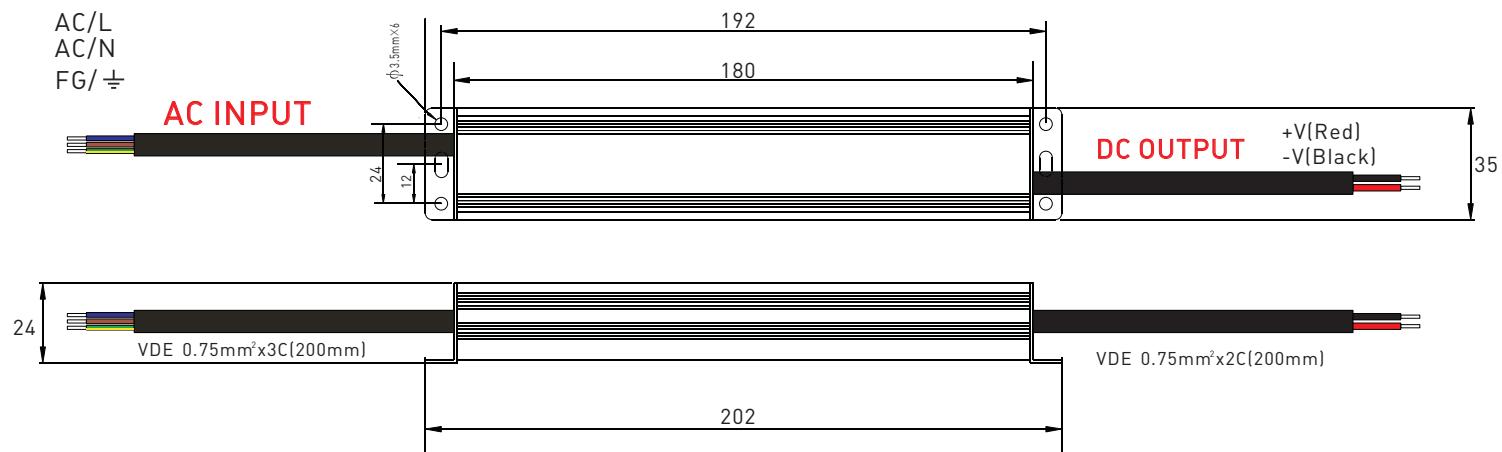

Relationship diagrams

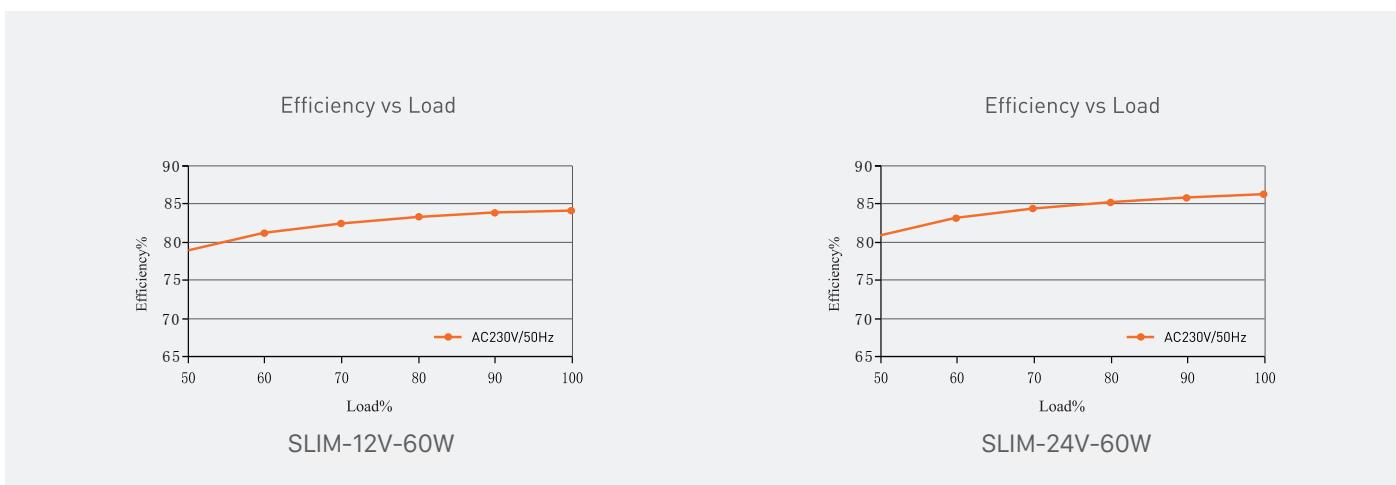

Packaging Information

DIMENSION	202x35x24mm(LxWxH)
PACKING	240x37x37mm(LxWxH)
CARTON QUANTITY	50PCS
CARTON SIZE	400x250x205mm(LxWxH)
WEIGHT	260g±10g/PCS

