

PEKI is the new technical shelf support with a captive design to lock glass shelves 4 to 10mm thick.

It consists of two elements:

- The main body with the locking screw pin.
 - The upper bracket with grooves which is pushed down into the main body until it perfectly fits the glass thickness.
- 90° clockwise turning of the screw pin and the glass is safely locked.

In accordance with the regulation UNI EN 14749/05.


Zinc alloy
Engineering plastic



ASSEMBLING


1

PEKI INSTALLATION INTO THE CABINET



2

INSERT THE GLASS SHELF DIAGONALLY INTO THE CABINET (ALSO WITH DOOR ALREADY ASSEMBLED).

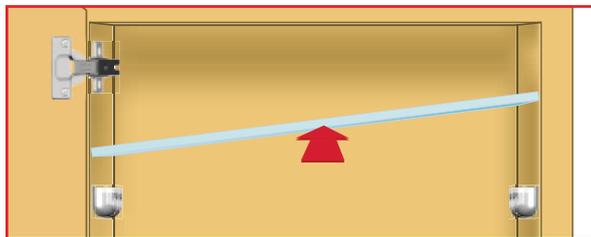



3



4


SECURE THE GLASS IN POSITION BY TURNING 90° DEGREES CLOCKWISE THE SCREW PIN.

PUSH DOWN THE UPPER BRACKET INTO THE MAIN BODY UNTIL IT PERFECTLY FITS THE GLASS THICKNESS

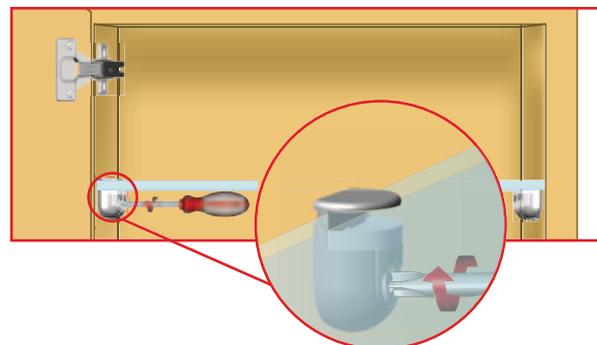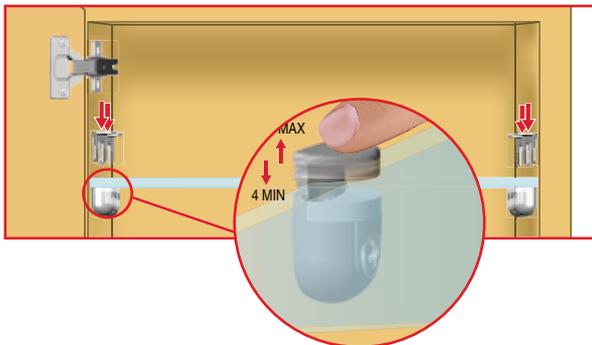

SHELF ASSEMBLING AND REPOSITIONING

SHELF REMOVAL
TURN THE SCREW PIN 90° DEGREES ANTICLOCKWISE AND EASE THE SHELF DIAGONALLY OUT

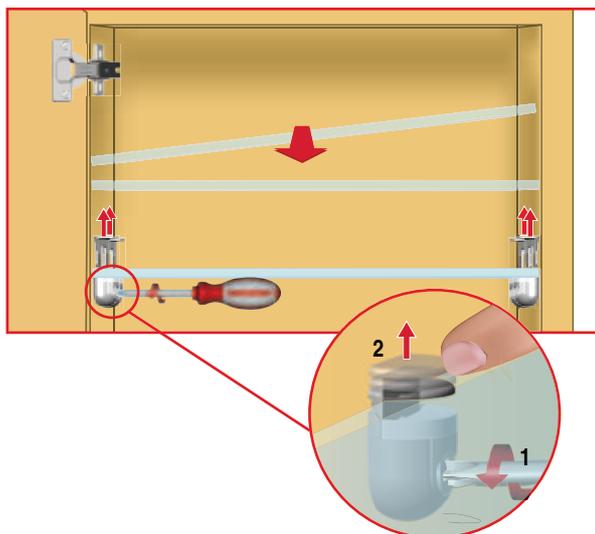

SHELF REPOSITIONING
TO REPOSITION THE SHELF REPEAT OPERATIONS AS SHOWN IN PCS. 2-3-4.

